


SMD Current Sense Transformer

MI-6200 Series



Mechanical Specification

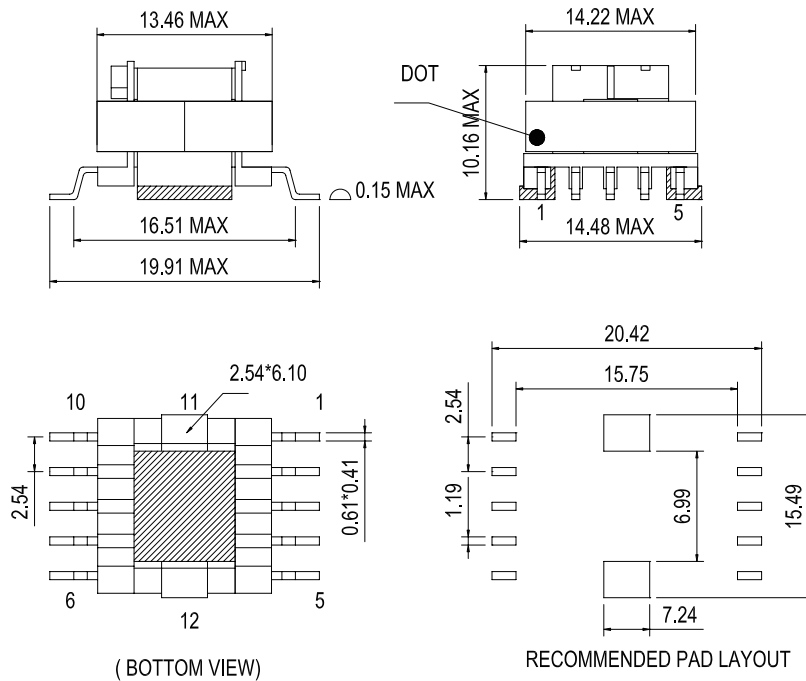

Features

- Current rating: up to 35A
- Frequency range: 50KHz to 500KHz
- 500V isolation winding to winding
- Low primary DCR
- RoHS compliant: 260°C compatible

Electrical Specification

Part Number	OCL(2-4) (mH) @ 0A	DCR (2-4) (Ω) Typ.	DCR (11-12) (mΩ) Typ.	Hi-pot Vrms
MI-6201-152	1.5 Min.	0.65	0.28	500
MI-6202-602	6.0 Min.	2.00	0.28	500
MI-6203-103	1.0 Min.	4.50	0.28	500
MI-6204-253	25.0 Min.	15.00	0.28	500

* Inductance measured across secondary @100KHz, 0.1Vrms.